



Addressable Fire Alarm Control Module AW-D112

Product Overview

Asenware AW-D112 is an intelligent addressable control module, which can be configured with Asenware AWFP100 Series Addressable Fire Alarm Control Panel. Each point (devices) can be given specific ID or individual address, which allows the panel to continuously monitor specific location (point). The module has two panel controlled LED indicator. AWD112 control modules provides a notification circuit to control panel which allows to activate the notification devices i.e. horn, strobes etc.



Product Features

- Addressable-analog communication
- Two-wire connection
- Two LEDs one is Green, which blinks in normal condition and another one is Red which becomes steady during fire alarm condition.
- Remote test from Panel

Technical Parameters

Model No.	AW-D112
Protection Level	IP 30
Operating Voltage	18V-28V DC
Load Capacity	≤ 200 mA
Standby Current	≤ 5mA
Temperature	-10°C~50°C


Installation

- AW-D110 addressable monitor module must be installed as per the final drawings and wiring diagram.
- Set the address on the monitor module using programmer.
- Secure the module in the electrical box, supplied with the monitor module

BOH Company Limited

Nat Sin Street #102, Kyee Myin Dine Township, Yangon 11101, Myanmar
Dartu 2nd Street #170A, Ward 2, Hlaing Township, Yangon 11051, Myanmar
www.boh.com.mm, 01-7511610, 09768207455 tto@boh.com.mm

Connection Diagram

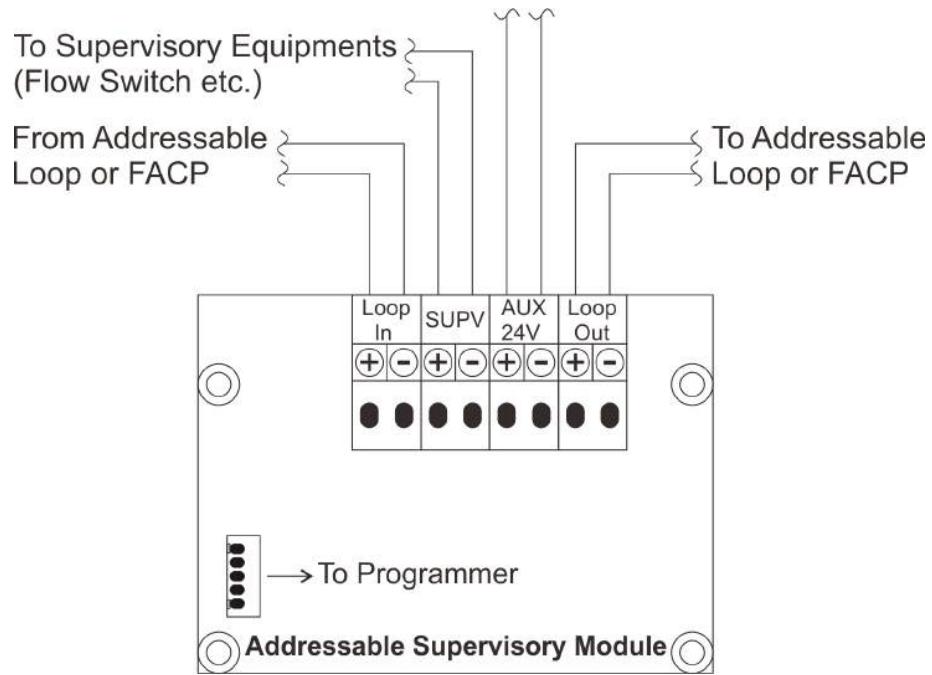

BOH Company Limited

Nat Sin Street #102, Kyee Myin Dine Township, Yangon 11101, Myanmar

Dartu 2nd Street #170A, Ward 2, Hlaing Township, Yangon 11051, Myanmar

www.boh.com.mm, 01-7511610, 09768207455 tto@boh.com.mm